




Authorised Dealer

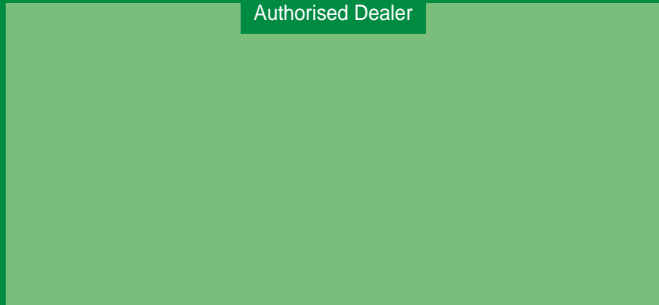

Gates India Pvt. Ltd.

Ambala Chandigarh Highway, Lalru - 140 501 (Punjab)

Customer Care: 0172-506888/89 Fax: 0172-506833

Email: customer care@gatesind.com Website: www.gatesind.com

Sales & Service

Ahmedabad
09879541028

Bengaluru
09980806613

Guwahati
09957567618

Hyderabad
09963011126

Jaipur
09828596825

Kolkata
09874084691

Mumbai
9821043574

New Delhi
09811006873

Pune
09765394036



Save On Down Time




GATES CARBON FREE HOSE

For Furnace Coolant Applications



Save On Down Time Use Gates System

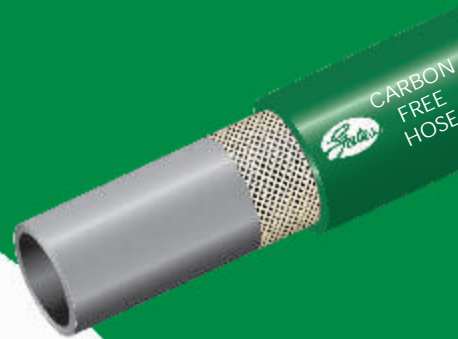

- First Choice of OEMs
- Superior Technology for Longer Life
- Preferred by the Steel Industry
- Low Leakage Current
- Benefit of Longer Lengths even in higher sizes




Insist on Gates Clamps for Greater Reliability and Superior Performance

Gates System Comprises of Hoses, Clamps and High Temperature Hose Protection Products (Sleeves)

Gates Carbon Free Hose offers an extremely long life through characteristics of Abrasion and Weather Resistance. You get high flexibility together with adequate toughness to help passing the electrical cable assembly through the hose. Gates Carbon Free Hose is specially designed and manufactured to take the abuse in your toughest working environments. You can always count on Gates Carbon Free Hose for optimal performance at a competitive price.

CARBON FREE HOSE

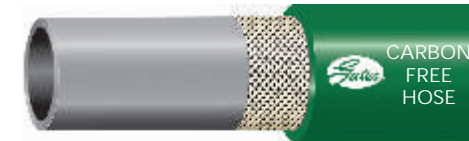

Recommended for : With excellent low leakage current less than 20 Micro Amp. at 6000V D.C., Gates Carbon Free Hose is recommended for Furnace Coolant & Electrical Cable Coolant Applications in Steel Industry and other non-conductive applications.

Service Temperature Range : -40°C to +100°C.

Construction:

- Tube : Specialized Synthetic Rubber, Grey color.
- Cover : Specially Compounded Nitrile, Green color.
- Reinforcement : High Tenacity Synthetic Yarn.

SPECIFICATIONS

Nominal I.D.	Mean O.D.		Working Pressure			Min. Burst Pressure			Suction		Min. Bend Radius		
	mm	Inch	mm	Inch	Kg/cm ²	MPa	PSI	Kg/cm ²	MPa	PSI	In. Hg	mm Hg	mm
12.70*	½*	21.6	0.85	17.20	1.72	250	69	6.90	1000	25.00	635	102	4.00
19.80	¾	31.0	1.22	17.20	1.72	250	69	6.90	1000	25.00	635	127	5.00
26.20	1	37.5	1.48	17.20	1.72	250	69	6.90	1000	25.00	635	152	6.00
32.40	1¼	45.2	1.78	17.20	1.72	250	69	6.90	1000	25.00	635	190	7.50
39.20	1½	53.6	2.11	17.20	1.72	250	69	6.90	1000	20.00	508	229	9.00
51.80	2	66.0	2.60	14.00	1.40	200	56	5.60	800	10.00	254	305	12.00
63.50	2½	81.0	3.18	14.00	1.40	200	56	5.60	800	10.00	254	508	20.00
76.20	3	93.5	3.68	14.00	1.40	200	56	5.60	800	5.00	127	635	25.00

*Imported Hose Offering. Branded as Premo Flex. Available in Red Color. Non Conductive @1000V D.C.-(1 MEGOHM/IN.)



GATES VALUE POINT : LOW LEAKAGE CURRENT



Experts at Gates developed this specialized product with the innovation of new rubber based compounds required to meet the demanding performance requirements in Furnace Coolant Applications. Gates Carbon Free Hose is a highly efficient product which offers features like low leakage current (less than 20 Micro Amp. at 6 KVD.C.) and significantly longer life.